Do you need a plumper or septic service?

Step 1 Check if more than one drain is backing up.




Step 2 Locate the septic system on your property.




The well and the septic tank will usually be located on opposite sides of the property.

Step 3 Open the header and check the wastewater levels.

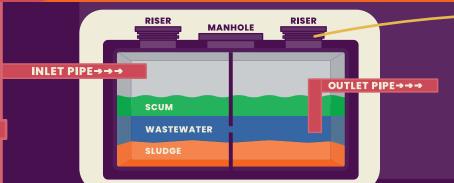

There should be an air gap of 8" - 10" between the top of the tank and the wastewater. If your wastewater level is less than 8 inches from the top of the inspection pipe, call ACE!



Step 4 Check the inlet pipe for blockage.



If you see toilet paper or other solid waste build up, carefully unclog it with a small hand tool.

A clogged inlet pipe could be indicative of septic trouble, so call ACE Septic & Waste after you've cleared the blockage.

ACE SEPTIC & WASTE

Septic services, simplified.

Call Us: 813-971-8770

Step 5 If you've cleared steps 1-4, call a plumber.



E office@acesepticandwaste.com
W www.acesepticandwaste.com

IG @aceseptic

FB @acesepticandwaste

Inspect • Maintain • Repair • Install